

ZSAM Injector

Bearing Mounting, Positive Displacement Injector, Oil

General

ZSAM Injectors deliver a fixed pre-measured quantity of lubricant at the outlet connection during each discharge cycle. ZSAM Injectors are available in seven discharge rates and are supplied in two body sizes. System distribution connections utilizing Bijur Delimon standard junctions, 4mm (5/32") secondary tubing, compression fittings and connectors can be used with these units.

Application

ZSAM Injectors can only be used in cyclic operation oil systems and feed in one direction only. ZSAM Injectors are designed for mounting directly at bearing inlet.

System Requirements

The lubricating pump in a PDI oil system must build up line pressure to 200 psi (14 bar) minimum to actuate injector discharge. Recommended operating pressure is 300 psi (21 bar). A pressure relief device must be used in the system to permit pressure to drop quickly to approximately 5-10 psi (0.3-0.7 bar) between lubrication cycles to allow injectors to fully reset, ready for next lubrication cycle.

Technical Data

Oil Viscosity	100-6500 SSU (20-1500 cSt) at operating temperature
Mounting	Direct at bearing inlet
Discharge	Preset (non-adjustable) in seven various rates
Maximum Operating Pressure	500 psi (34 bar)
Minimum Operating Pressure	200 psi (14 bar)
Maximum Relieving Pressure	10 psi (0.7 bar)
Maximum Operating Temperature	175°F (80°C)
Seals	Nitrile (Buna N)
Leaktight Junction Connection	4.5 Newton-Meter (40 pound inch maximum)

Typical Tubing Connections

Feed line inlet internal thread M8 X 1 and seating connection for 4mm (5/32") diameter tubing: Use compression sleeve, part #B1061 (for metal tubing); part #B8272 (for nylon tubing) and compression bushing, part #15328C.

Bearing Mounting

External thread 1/8" BSPT suitable for oil tight connection to facilitate ubobtrusive connection at bearing inlet: Use 90° elbow connector 1/8" BSPT male and female thread, part #19832.

PRODUCT PHOTO
COMING SOON

BIJUR DELIMON INTERNATIONAL


(919) 465 4448 LOCAL
(800) 631 0168 TOLL-FREE
(919) 465 0516 FAX

WWW.BIJURDELIMON.COM


2100 Gateway Centre Blvd., Suite 109
Morrisville, NC 27560

Operation


Rest Position

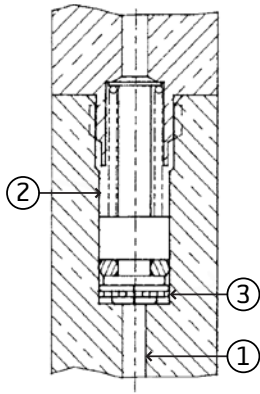

Discharge Cycle

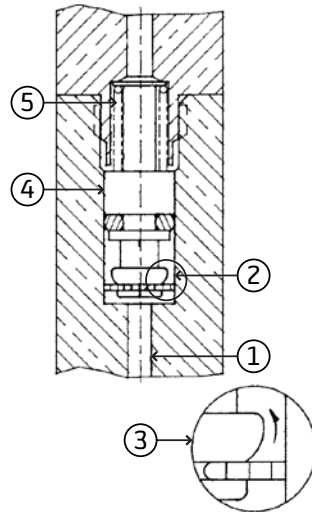

Return Cycle

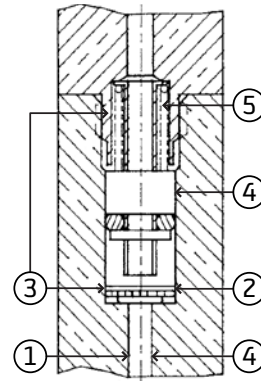

Illustrations and specifications are not binding in detail.

Designs are subject to modification and improvement without notice.

Rest Position

1. No system pressure.
2. Oil from previous cycle fills spring chamber.
3. Disc seal covers inlet.

Discharge Cycle

1. System pressure builds up and forces oil into inlet.
2. Disc "collapses," oil is forced into inlet chamber around disc seal.
3. Disc transfers seal to hollow piston rod.
4. Disc and piston assembly (piston, spring and hollow transfer tube) are compressed.
5. Oil in outlet chamber is displaced "positively" to the lube point by the advancing pin.
6. Piston assembly continues travel towards outlet until piston reaches shoulder of outlet chamber.

Return Cycle

1. Pressure is quickly relieved from injector inlet.
2. Disc seal relaxes and seals injector inlet as piston is forced downward by spring.
3. Piston forces oil in intake chamber up through hollow transfer tube into spring chamber.
4. Injector is ready for the next cycle.

BIJUR DELIMON INTERNATIONAL

(919) 465 4448 LOCAL
(800) 631 0168 TOLL-FREE
(919) 465 0516 FAX

WWW.BIJURDELIMON.COM


2100 Gateway Centre Blvd., Suite 109
Morrisville, NC 27560

How to Order

Model	Discharge	Part #
ZSAM-01	0.01cc	18312-01
ZSAM-025	0.025cc	18312-025
ZSAM-06	0.06cc	18312-06
ZSAM-10	0.10cc	18312-10
ZSAM-20	0.20cc	18312-20
ZSAM-30	0.30cc	18312-30
ZSAM-40	0.40cc	18312-40

When ordering, specify by model, discharge and part number, e.g. ZSAM-10 Injector, 0.10cc Discharge, Part #18312-10.

Dimensional Schematics

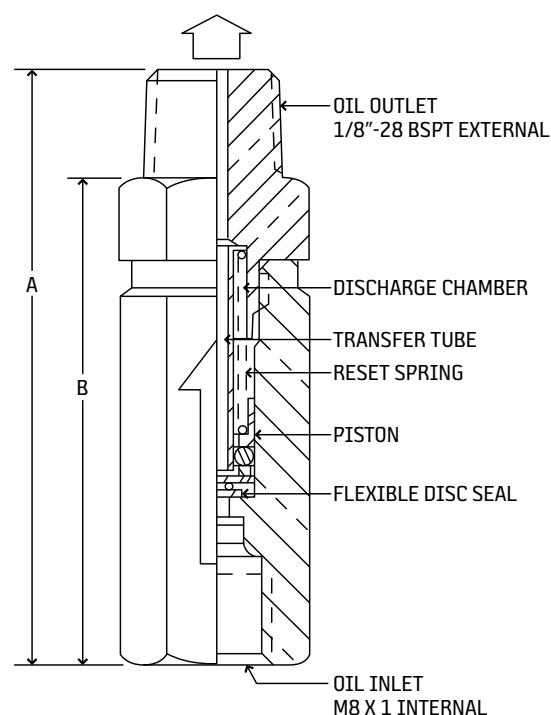

Model	A	B	Hex Width (across flats)
ZSAM-01	44mm (1.74")	36mm (1.43")	12.7mm (0.50")
ZSAM-025	44mm (1.74")	36mm (1.43")	12.7mm (0.50")
ZSAM-06	44mm (1.74")	36mm (1.43")	12.7mm (0.50")
ZSAM-10	44mm (1.74")	36mm (1.43")	12.7mm (0.50")
ZSAM-20	53mm (2.09")	45mm (1.78")	12.7mm (0.50")
ZSAM-30	53mm (2.09")	45mm (1.78")	12.7mm (0.50")
ZSAM-40	53mm (2.09")	45mm (1.78")	12.7mm (0.50")

BIJUR DELIMON INTERNATIONAL

(919) 465 4448 LOCAL
(800) 631 0168 TOLL-FREE
(919) 465 0516 FAX

WWW.BIJURDELIMON.COM

2100 Gateway Centre Blvd., Suite 109
Morrisville, NC 27560