

Product description
Measuring
valve DDU

DESCRIPTION

Line mounting adjustable metering units for use with a dual-line system, which discharge a fixed volume of lubricant to half the lubrication points on pressurisation of one line and to the remaining points on pressurisation of the second line.

PRODUCT CHARACTERISTICS


- up to 350 bar
- Motion indicator with cover
- Metered volume from 0.5 to 3.5 cm³




BENEFITS

- The measuring valve can have from one to four independent operating sections.
- Two normal discharge connections for each operating section reduce the overall cost of the system.
- Any section of the valve can be modified to one discharge, allowing a double sized discharge or an odd number of outlets on the valve.
- Wide stepless adjustment bands for each size of valve allow optimum lubrication delivery to every bearing.
- Positive hydraulic operation with visible indicator of operation.


OPERATION

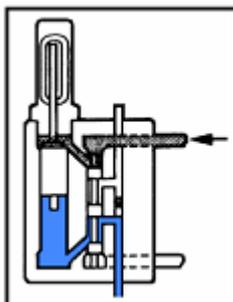


1. Pressurisation of the upper supply line forces the inlet piston down, thereby un-covering both diagonal passages. Lubricant passes through the upper diagonal passage into the main chamber and acts on the top of the main piston, causing it to move.

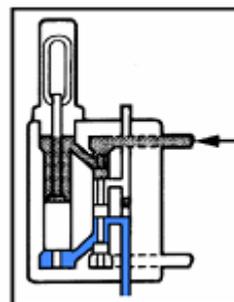

2. Maintained upper supply line pressure forces the main piston to the lowest limit of its travel, delivering the full measured charge to the bearing. Beyond this point, maintaining upper supply line pressure will have no effect.

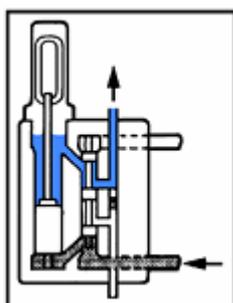

3. Pressure is switched to the lower supply line (on a signal from the flow directing valve) which forces the inlet piston up, thereby uncovering both diagonal passages. Lubricant passes through the lower diagonal into the main chamber and acts on the bottom of the main piston, causing it to move upward.

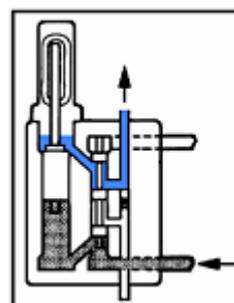

4. Maintained lower supply line pressure forces the main piston to the uppermost limit of its travel, delivering the full measured charge to the bearing. Beyond this point, maintaining lower supply line pressure will have no effect.

A. DISTRIBUTOR TYPE	Code
	DDU

B. NUMBER OF OUTLETS	Code
DDU 2 (2 outlets)	02
DDU 4 (4 outlets)	04
DDU 6 (6 outlets)	06
DDU 8 (8 outlets)	08

C. REVISION	Code
Status A	A


D. ACCESSORIES	Code
without	00

SPECIFICATION

Max. supply pressure	350 bar	
Max. discharge pressure	70 bar	
Temperature range	- 20°C to + 120°C	
Materials	Body	Steel
	Pistons	Hardened steel
	Packing gland	Brass
	Seals	Viton
	Indicator Stem	Stainless steel

Valve size	Discharge per outlet per double cycle (cm²)	
	Maximum	Minimum
DDU	3.50	0.50

ADJUSTMENT



The valve discharge must be set on site to suit the application. This will be found by examination of the bearing or slide after the initial operation. If excess lubricant is present, reduce the valve stroke. If dry, increase the valve stroke. The cycle between cycles may also have to be adjusted.


ORDERING

Valve model	Number of	Stock code	Weight (kg)
DDU 1	1	17210	1.35
DDU 2	2	17220	1.35
DDU 3	3	17230	2.40
DDU 4	4	17240	2.40
DDU 5	5	17250	3.40
DDU 6	6	17260	3.40
DDU 7	7	17270	4.45
DDU 8	8	17280	4.45

INSTALLATION

All ports are suitable for BSP taper fittings. Extension nipples may be required to allow connections to central ports especially at the gland end. Valves have two outlet ports for each operating section. If an odd number of outlets is required either to suit the installation or to give twice the maximum discharge, an internal cross porting plug must be removed (see installation and maintenance sheet). It is important that the plug is removed before plugging an outlet otherwise an hydraulic lock will prevent operation of the opposite port.

DIMENSIONS

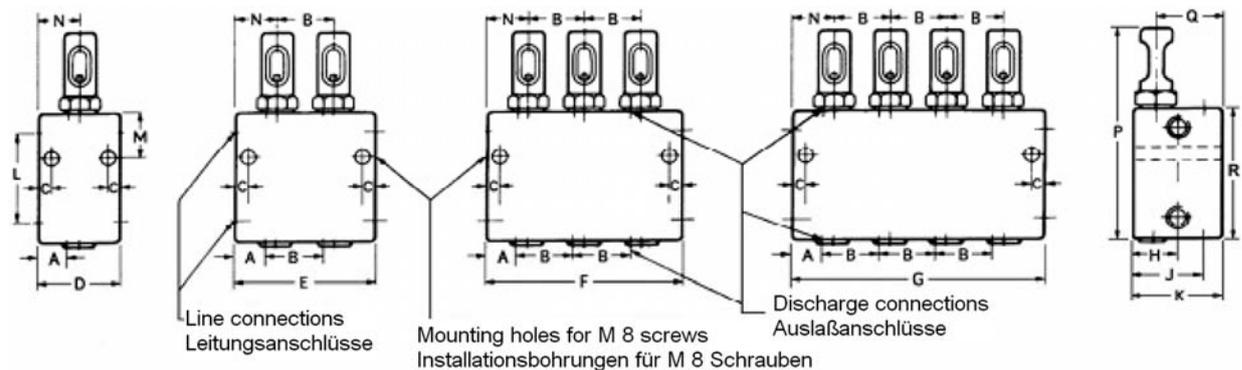

Valve size	Dimensions (mm)																Connections	
	A	B	C	D	E	F	G	H	J	K	L	M	N	P	Q	R	Line	discharge
DDU	18	32	7	45	76	108	140	27	44	54	57	27	24	137	42	79	3/8"	1/4"

EXAMPLE OF ORDERING

		Code								
		D	D	U	0	2	A	0	0	
Distributor type DDU	Code: DDU	D		D		U				
Number of outlets 2 outlets	Code: 02			0		2				
Revision Status A	Code: A					A				
Accessories without	Code: 00							00		

DELIMON GmbH

Zentrale

Arminstraße 15
D-40227 Düsseldorf
Telefon: +49 211 7774 0
Telefax: +49 211 7774 210
kontakt@bijurdelimon.com
www.bijurdelimon.com

DELIMON

Niederlassung Beierfeld

Am Bockwald 4
D-08344 Grünhain-Beierfeld

DELIMON

Österreich

Am Heumarkt 10
A-1030 Wien
Telefon: +43 1 711 471 391
Telefax: +43 1 711 471 398
kontakt@bijurdelimon.com
www.bijurdelimon.com

LUBRIMONSA

Spain

Avda. Txori-Erri 38
48150 Sondica - (Vizcaya)
Teléfono: +34 94 453 20 00
Fax: +34 94 453 25 00
spain@bijurdelimon.com

DENCO Lubrication Ltd.

DELIMON-Cooling

United Kingdom

Ramsden Court, Ramsden Road
Rotherwas Industrial Estate
Hereford, HR2 6LR
Phone: +44 (0) 1432 365 000
Fax: +44 (0) 1432 365 001
info@delimon.co.uk
www.bijurdelimon.com

BIJUR Products, Inc.

France

P.O. Box 50
Z.I. de Courtabœuf
9, Avenue du Québec
91942 Courtabœuf Cedex
Tél.: +33 1 692 985 85
Fax: +33 1 690 776 27
contact@bijurdelimon.com
www.bijurdelimon.com

BIJUR Lubricating Ireland Ltd.

Gort Road
Ennis, County Clare
Tel.: +35 3 65 682 1543
Fax: +35 3 65 682 0327
www.bijurdelimon.com

*Für reibungslose Bewegung
For smooth motion*