

Product description
Pump TB-D
Hand lever

APPLICATION

For lubrication at friction points on presses, stamping presses, machine tools, conveyors, etc.

PRODUCT CHARACTERISTICS

- Multi-line pump
- Hand lever actuation
- Output volume max. 0.5 cm³/stroke
- Discharge pressure max. 25 bar
- Lubricant: grease
- Surface signal grey RAL 7004



FUNCTION

By pulling the hand lever the piston is raised and grease is forced into the inner bore of the piston. During the upward motion of the latter the cross bore connects the inside chamber of the piston with the outlet ports one after the other. These ports one are not on the same level and the ring groove of the cross port frees the way to the outlet ports alternatively. When returning the hand lever to its original position the piston is lowered and lubricant is sucked into the required cap.

A. PUMP TYPE	Code
	TBH

B. ANZAHL DER AUSLÄSSE	Code
1 outlet	01
2 outlets	02
4 outlets	04
5 outlets	05
6 outlets	06
8 outlets	08
Outlet X	10

C. REVISION	Code
Status A	A

D. KINDS OF DRIVE	Code
Hand lever	01


E. POSITION OF DRIVE	Code
without	O

F. RESERVOIR	Code
0.25 liters grease	A
0.65 liters grease	B

G. ACCESSORIES	Code
without	00

SPECIFICATION

Discharge pressure : _____ max. 25 bar
 Number of outlets : _____ at choice 1, 2, 4, 5, 6 or 8
 Operating force at 25 bar : _____ 200 N (20 kp)
 Output volume per stroke : _____ outlet 1, 2, 4, 5, 6 or 8 each 0.5 cm³
 Reservoir capacity : _____ 0.25 l or 0.65 liters
 Lubricants :
 Grease _____ up to NLGI class 2, DIN 51818
 Service temperature : _____ - 20 °C up to + 80 °C

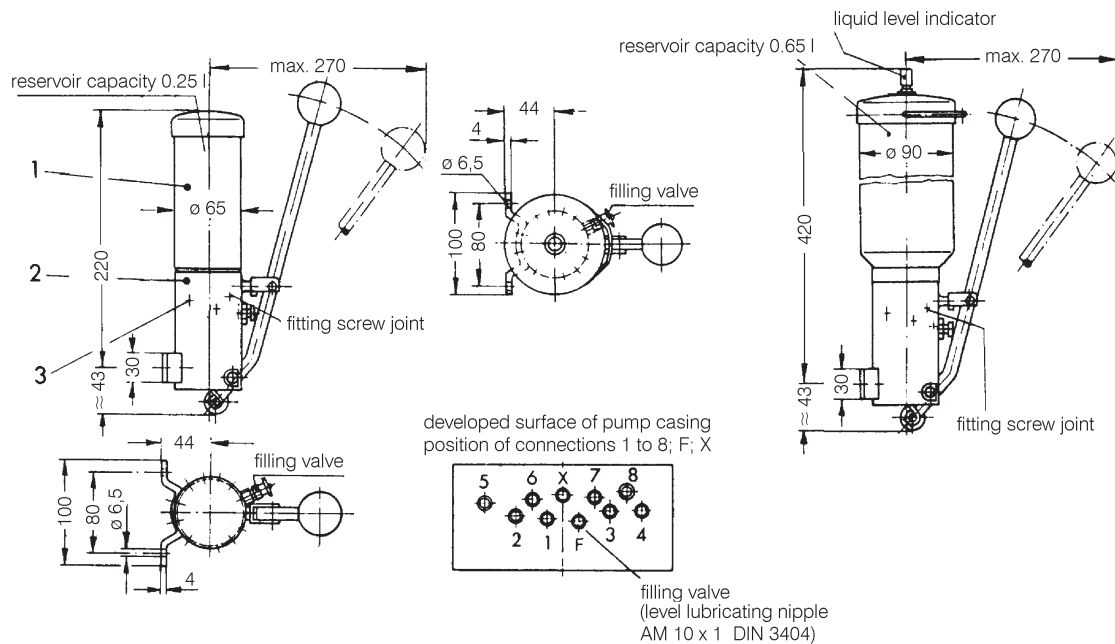

EXAMPLE OF ORDER

		Code											
		T	B	H	0	1	A	0	1	O	A	0	0
Pump type TB-D	Code: TBH												
Number of outlets 1 outlet	Code: 01												
Revision Status A	Code: A												
Kinds of drive Hand lever	Code: 01												
Position of drive without	Code: O												
Reservoir 0.25 liters grease	Code: A												
Accessories without	Code: 00												



DELIMON

Zentrale

Arminstraße 15
D-40227 Düsseldorf
Postfach 10 20 52
D-40011 Düsseldorf
Telefon: +49 211 7774 0
Telefax: +49 211 7774 210
kontakt@bijurdelimon.com
www.bijurdelimon.com

DELIMON

Niederlassung

Am Bockwald 4
D-08344 Grünhain-Beierfeld

DELIMON

Österreich

Am Spitz 2-3 / Schloßhofer Str. 4-6
Stiege 4, Top 20
A-1210 Wien
Telefon: +43 1 585 66 17
Telefax: +43 1 585 66 17 50
kontakt@bijurdelimon.com
www.bijurdelimon.com

LUBRIMONSA

Spain

Avda. Txori-Erri 38
48150 Sondica - (Vizcaya)
Teléfono: +34 94 453 20 00
Fax: +34 94 453 25 00
spain@bijurdelimon.com
www.bijurdelimon.com

DELIMON-Denco Lubrication

DELIMON-Cooling

United Kingdom

Ramsden Court, Ramsden Road
Rotherwas Industrial Estate
Hereford, HR2 6LR
Phone: +44 (0) 1432 365 000
Fax: +44 (0) 1432 365 001
info@delimon.co.uk
www.bijurdelimon.com

BIJUR Products, Inc.

France

BP 50
ZI de Courtabœuf
5, Avenue de l'Atlantique
91942 Les Ulis Cedex
Tél.: +33 1 692 985 85
Fax: +33 1 690 776 27
contact@bijurdelimon.com
www.bijurdelimon.com

*Für reibungslose Bewegung
For smooth motion*

