

## Product description Distributor E4

### APPLICATION

Positive dividers type E4 are employed for progressive centralized lubrication systems. The grease or oil fed into them under pressure is distributed to various lubrication points or slave dividers.

If so required, the dividers can also be installed in oil circulating, single, dual or multi-line systems to divide the lubricant in a supply line and feed it to several lubrication points.




### PRODUCT CHARACTERISTICS

- Progressive distributor
- Grease and oil
- Metered volume 0.4 cm<sup>3</sup>
- Working pressure max. 160 bar
- Material: steel

### FUNCTION

Each divider incorporates two pistons that under the feed pressure of the lubricant are forced into their two end positions in alternation. A locking pin between the two pistons ensures that only one piston can move at a time. Depending on the end position of the locked piston, lubricant fed into the centre channel flows into the end space ahead of the other piston, which then moves to the opposite end position and in so doing forces the entrapped lubricant through an annular space around the locked piston and out of the discharge port. Immediately this movement is completed the piston is locked, thereby releasing the other piston, which continues the cycle.

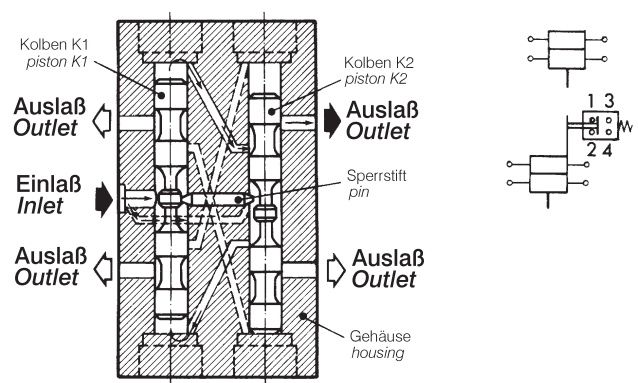

A. DISTRIBUTOR TYPE	Code
---------------------	------

PE4

B. NUMBER OF OUTLETS	Code
----------------------	------

2 outlets

02

3 outlets

03

4 outlets

04

C. REVISION	Code
-------------	------

Status A

A

D. MONITORING	Code
---------------	------

without motion indicator

00

with motion indicator without electrical monitoring


01

with motion indicator with electrical limit switch

02

with motion indicator with electronic monitoring switch

03

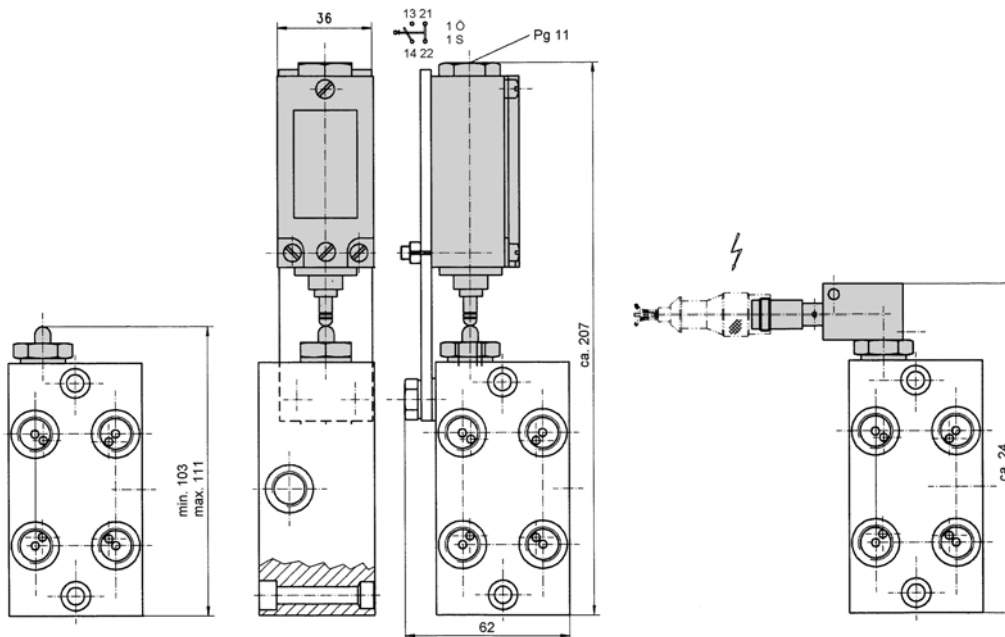


E. ACCESSORIES	Code
----------------	------

without

00

## SPECIFICATION

Max. admissible working pressure : \_\_\_\_\_ 160 bar  
 Max. admissible differential pressure between 2 outlets : \_\_\_\_\_ 100 bar  
 Control pressure min. : \_\_\_\_\_ 10 bar  
 Metered volume : \_\_\_\_\_ 0.4 cm<sup>3</sup> per piston stroke  
 Internal actuation volume : \_\_\_\_\_ 0.3 cm<sup>3</sup>  
 Temperature range : \_\_\_\_\_ - 20° C to + 80° C  
 Suitable lubricants : \_\_\_\_\_ all grease having a consistency of up to penetration class 3 and all oils having a viscosity of 190 mm<sup>2</sup>/s at service temperature (approx. 20° C).

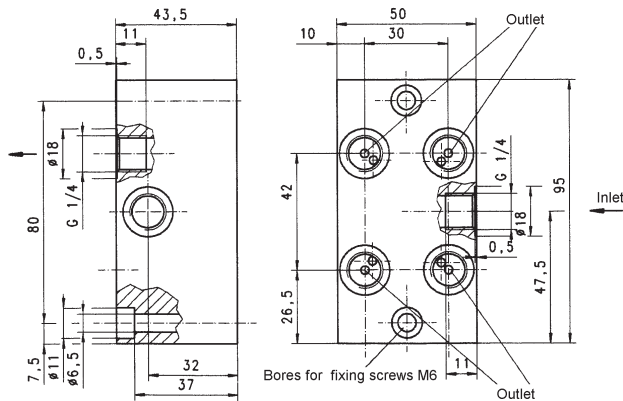

## EXAMPLE OF ORDER

		Code									
		P	E	4	0	4	A	0	2	0	0
<b>Distributor type E4</b>	Code: PE4										
<b>Number of outlets</b> 4 outlets	Code: 04										
<b>Revision</b> Status A	Code: A										
<b>Monitoring</b> with motion indicator with electrical limit switch	Code: 02										
<b>Accessories</b> without	Code: 00										

**DELIMON GmbH  
Zentrale**

Arminstraße 15  
D-40227 Düsseldorf  
Telefon: +49 211 7774 0  
Telefax: +49 211 7774 210  
kontakt@bijurdelimon.com  
www.bijurdelimon.com

**DELIMON  
Niederlassung Beierfeld**  
Am Bockwald 4  
D-08344 Grünhain-Beierfeld

**DELIMON  
Österreich**  
Gabrielerstrasse 37  
A-2340 Mödling  
Telefon: +43 1 585 66 17  
Telefax: +43 1 585 66 17 50  
kontakt@bijurdelimon.com  
www.bijurdelimon.com

**LUBRIMONSA  
Spain**

Avda. Txori-Erri 38  
48150 Sondica - (Vizcaya)  
Teléfono: +34 94 453 20 00  
Fax: +34 94 453 25 00  
spain@bijurdelimon.com

**DENCO Lubrication Ltd.  
DELIMON-Cooling  
United Kingdom**  
Ramsden Court, Ramsden Road  
Rotherwas Industrial Estate  
Hereford, HR2 6LR  
Phone: +44 (0) 1432 365 000  
Fax: +44 (0) 1432 365 001  
info@delimon.co.uk  
www.bijurdelimon.com

**BIJUR Products, Inc.  
France**

P.O. Box 50  
Z.I. de Courtabœuf  
9, Avenue du Québec  
91942 Courtabœuf Cedex  
Tél.: +33 1 692 985 85  
Fax: +33 1 690 776 27  
contact@bijurdelimon.com  
www.bijurdelimon.com

**BIJUR Lubricating Ireland Ltd.**

Gort Road  
Ennis, County Clare  
Tel.: +35 3 65 682 1543  
Fax: +35 3 65 682 0327  
www.bijurdelimon.com

*Für reibungslose Bewegung  
For smooth motion*