

# Series 1000 Divider Valve Manifold

## Progressive Systems



### General

The Series 1000 progressive divider valve manifold distributes and proportions incoming oil or grease to bearing points. A typical divider valve manifold consists of an inlet section, three to nine valves and an end section. One assembly can serve up to a maximum of 18 lubrication points. Location of valve blocks within the manifold is not critical – however, it is recommended that the largest block be located next to the inlet block.

Individual divider valve blocks have a sliding discharge piston and built-in outlet check valves. Blocks are offered in three output sizes. The discharge capacity of a block is determined by varying the piston diameter in the valve block. Valve blocks have two outlets located at each end of the assembly (double outlet blocks) and supply rated discharge outputs from each of the two outlets during one complete valve cycle.

Single outlet blocks have one end outlet plugged (right side, inlet at top) and supply twice the rated output to the open outlet (left side, inlet at top). For a right sided open outlet, simply remove plug and insert in the left outlet. External crossporting of adjacent valves can be achieved with a special tubing kit to combine outputs.

### Operation

Individual valve blocks operate in a pre-arranged “progressive” sequence. During operation, the piston within the block must complete a full discharge cycle before another piston begins operation. As long as lubricant is supplied under pressure to the inlet section of the divider, manifold valve blocks will continue to operate in a progressive manner.

When lubricant flow is interrupted to the inlet block, piston movement stops. When flow resumes, piston movement commences at the same point in the discharge cycle. Feed lines deliver lubricant from the valve block to individual lube points. Should a discharge line become blocked, it will stop all the valves operating. Indicators are available to alert a blockage.

### Technical Data

Material	Steel (zinc plated)
Maximum Operating Pressure	138 bar (2,000 psi)
Lubricant	Oil, up to NLGI No. 2

#### *Approximate Weight of Complete Divider Valve Grease Assembly*

3 Section Divider	0.88 kg (1 lb, 15 oz)
4 Section Divider	1.04 kg (2 lb, 5 oz)
5 Section Divider	1.21 kg (2 lb, 11 oz)
6 Section Divider	1.38 kg (3 lb, 1 oz)
7 Section Divider	1.55 kg (3 lb, 7 oz)
8 Section Divider	1.72 kg (3 lb, 13 oz)
9 Section Divider	1.90 kg (4 lb, 3 oz)



#### BIJUR DELIMON INTERNATIONAL

(919) 465 4448 LOCAL  
(800) 631 0168 TOLL-FREE  
(919) 465 0516 FAX

[WWW.BIJURDELIMON.COM](http://WWW.BIJURDELIMON.COM)

1 Copley Parkway, Suite 104  
Morrisville, NC 27560

## Output Displacement

Valve Sizes	Cu. in. (cc) per Outlet
05T (Twin Outlets)	0.005 (0.082)
10T (Twin Outlets)	0.010 (0.164)
15T (Twin Outlets)	0.015 (0.246)
05S (Single Outlet)	0.010 (0.164)
10S (Single Outlet)	0.020 (0.328)
15S (Single Outlet)	0.030 (0.492)

*Note: Single outlet blocks discharge double their rated capacity during one complete valve cycle.*

## Accessories



### Cycle Indicators

An optional cycle indicator in the valve block assembly monitors lubricant flows through the assembly. Pin cycles in and out with piston movement. An electrical mechanical device can be mounted on valve block to monitor normal operation of the divider. Cycle indicators not available in .005 and .010 cu. in. capacities. Refer to assembly ordering codes on page 4.


### "C" Porting Kit

For front mounted crossporting, remove plugs from face of adjacent valves and install "C" port assembly (see picture at right). **Note:** One of the removed plugs must be used to close upper side outlet of crossported valves. An optional arrangement to front face mounting is to interconnect discharge ports of two valves.

### Tube Connection Fittings

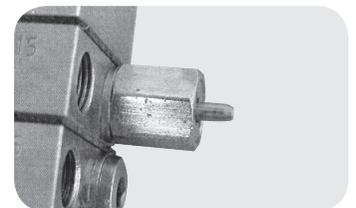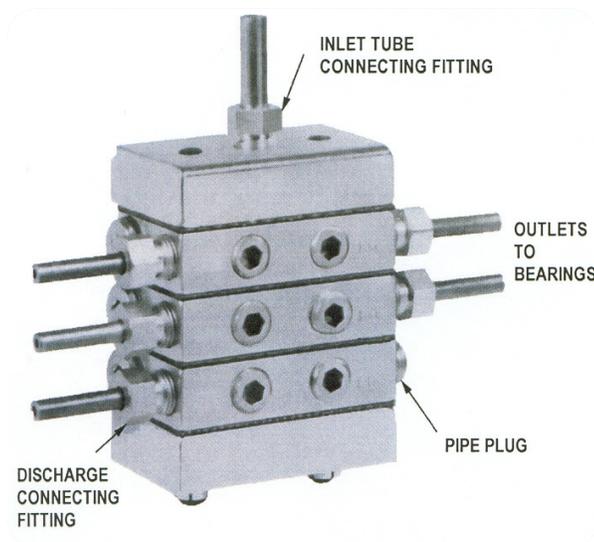

Cycle Indicator

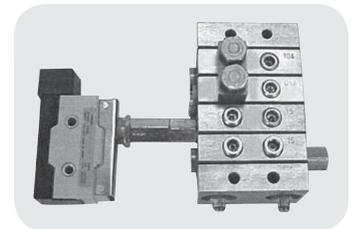

"C" Porting on face of valve section

BIJUR DELIMON INTERNATIONAL

(919) 465 4448 LOCAL  
 (800) 631 0168 TOLL-FREE  
 (919) 465 0516 FAX

[WWW.BIJURDELIMON.COM](http://WWW.BIJURDELIMON.COM)

1 Copley Parkway, Suite 104  
 Morrisville, NC 27560



## How to Order

### Individual Valve Block Sections

Options	Discharge Port Thread	Part #	
		Single Outlet*	Twin Outlet
	1/8" NPT	1000-05AS	1000-05AT
	1/8" BSP	1000-05ASBSP	1000-05ATBSP
	1/8" NPT	1000-10AS	1000-10AT
	1/8" BSP	1000-10ASBSP	1000-10ATBSP
	1/8" NPT	1000-15AS	1000-15AT
	1/8" BSP	1000-15ASBSP	1000-15ATBSP
Cycle Indicator	1/8" NPT	1000-157LS (left side)	1000-157LT
	1/8" BSP	1000-157LSBSP	1000-157LTBSP
	1/8" NPT	1000-157RS (right side)	1000-157RT
	1/8" BSP	1000-157RSBSP	1000-157RTBSP
Cycle Indicator and Switch	1/8" NPT	1000-158LS (left side)	1000-158LT
	1/8" BSP	1000-158LSBSP	1000-158LTBSP
	1/8" NPT	1000-158RS (right side)	1000-158RT
	1/8" BSP	1000-158RSBSP	1000-158RTBSP

\*Open outlet on left side.

### Divider Block Components

Description	Part #
Inlet Section 1/8" NPT	1006-1
Inlet Section 1/8" BSP	1006-1BSP
End Block	1007-1
Gaskets	1009
Tie Rod Kit, 3 Valves	1017-3K
Tie Rod Kit, 4 Valves	1017-4K
Tie Rod Kit, 5 Valves	1017-5K
Tie Rod Kit, 6 Valves	1017-6K
Tie Rod Kit, 7 Valves	1017-7K
Tie Rod Kit, 8 Valves	1017-8K
Tie Rod Kit, 9 Valves	1017-9K

Note: Kit includes 1 tie rod and 1 nut. (Two kits per 1000 Divider required)

### Accessories

Name	Description	Pipe Thread	Tube Diameter	Part #
Tube Connection Fitting	For Inlet Port	1/8" NPT	1/4"	U81B1
		1/8" BSP	6mm	AR154
	For Discharge Port	1/8" NPT	3/16"	U81AA1
		1/8" BSP	4mm	AR974
Crossport Bar	Tube Jumper Kit	1/8" NPSF	3/16"	32265-2
		1/8" BSPP	4mm	32265-1
Closure Plugs		1/8" NPT	---	28528-2
		1/8" BSP	---	28516-2

BIJUR DELIMON INTERNATIONAL

(919) 465 4448 LOCAL  
(800) 631 0168 TOLL-FREE  
(919) 465 0516 FAX


[WWW.BIJURDELIMON.COM](http://WWW.BIJURDELIMON.COM)

1 Copley Parkway, Suite 104  
Morrisville, NC 27560

## Dimensional Schematic

### Valve Manifolds Assemblies

Measurements shown in inches.

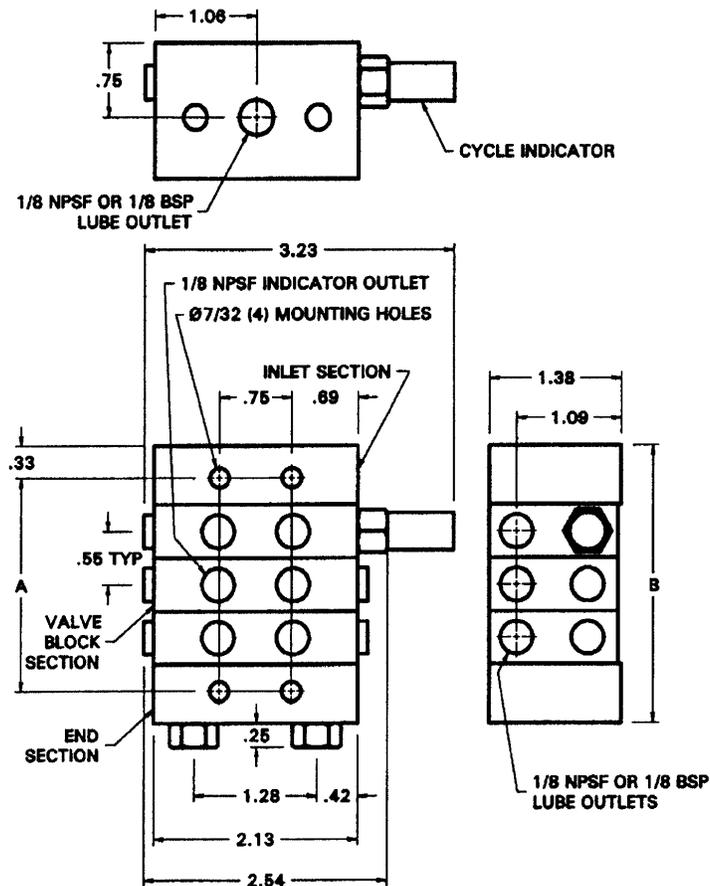

Valve Blocks (#)	A (approximate)	B (approximate)
3	59.4mm (2.34")	73.1mm (2.87")
4	74.2mm (2.92")	87.9mm (3.46")
5	89.0mm (3.50")	102.6mm (4.04")
6	103.7mm (4.08")	117.4mm (4.62")
7	118.5mm (4.66")	132.2mm (5.20")
8	133.3mm (5.25")	147.0mm (5.78")
9	148.1mm (5.83")	161.8mm (6.37")

BIJUR DELIMON INTERNATIONAL

(919) 465 4448 LOCAL  
 (800) 631 0168 TOLL-FREE  
 (919) 465 0516 FAX

[WWW.BIJURDELIMON.COM](http://WWW.BIJURDELIMON.COM)

1 Copley Parkway, Suite 104  
 Morrisville, NC 27560